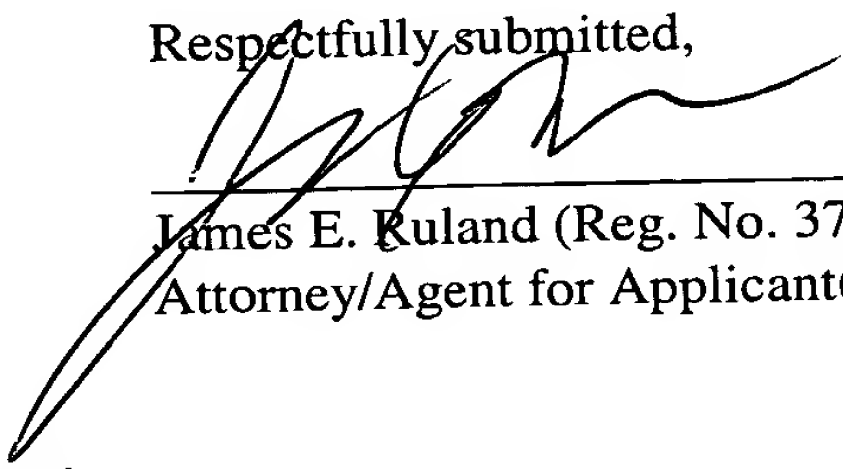


**REMARKS**

Applicants hereby present claims 4-12 drawn to a hydrocracking process. If the Examiner has any questions, please contact the undersigned at the number provided below.

Respectfully submitted,

  
James E. Kuland (Reg. No. 37,432)  
Attorney/Agent for Applicant(s)

MILLEN, WHITE, ZELANO  
& BRANIGAN, P.C.  
Arlington Courthouse Plaza 1, Suite 1400  
2200 Clarendon Boulevard  
Arlington, Virginia 22201  
Telephone: (703) 243-6333  
Facsimile: (703) 243-6410  
Attorney Docket No.: PET 1765D1

Date: October 1, 2001

JER/ivb:K:\PET\1765D1\PREL AMEND 8-20-01.doc

**VERSION WITH MARKINGS TO SHOW CHANGES MADE**

**IN THE CLAIMS**

Claim 4 has been amended as follows.

4. (Amended) A hydrocracking process ~~using~~ comprising contacting a hydrocarbon feed with a catalyst comprising:

- 0.1-99.7% by weight of at least one alumina matarix;
- 0.1-80% by weight of at least one globally non dealuminated Y zeolite with a lattice parameter of more than 2.438 nm, a global SiO<sub>2</sub>/Al<sub>2</sub>O<sub>3</sub> mole ratio of less than 8, and a framework SiO<sub>2</sub>/Al<sub>2</sub>O<sub>3</sub> mole ratio of less than 21 and more than the global SiO<sub>2</sub>/Al<sub>2</sub>O<sub>3</sub> mole ratio;
- 0.1-30% by weight of at least one group VIII metal and/or 1-40% by weight of at least one group VIB metal (% oxide);
- 0.1-20% by weight of at least one promoter element selected from the group formed by boron and silicon (% oxide);
- 0-20% by weight of at least one group VIIA element;
- 0-20% by weight of phosphorous (% oxide);
- 0.1-20% by weight of at least one group VIIB element;

~~according to any one of the preceding claims,~~ carried out at a pressure of at least 2 MPa, a temperature of at least 230°C, using a quantity of hydrogen of at least 100 NI hydrogen/l of feed and with an hourly space velocity of 0.1-10h<sup>-1</sup>.

K:\pet\1765d1\PREL AMEND 8-20-01.doc